
[illegible]45-40 [illegible]OTP

Model No. JW-AP15

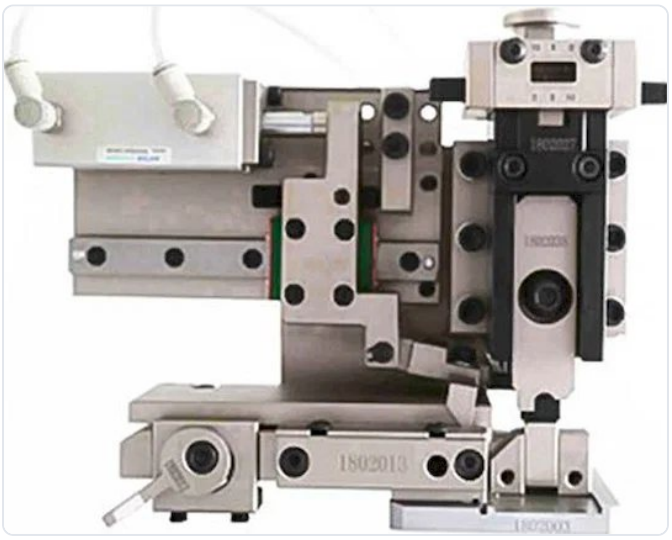

SPECIFICATIONS

[illegible]	45-40
[illegible]	[illegible]
[illegible]	[illegible]OTP
[illegible]	[illegible]
[illegible]	[illegible]

[illegible]45-40, [illegible], [illegible], [illegible]OTP, [illegible], [illegible]OTP, [illegible]OTP, [illegible], [illegible]OTP [illegible], [illegible], [illegible], [illegible]OTP, [illegible]

OTP high precision horizontal mold



Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 30mm
Scope of application:
It is suitable for high-precision terminal and connection wire manufacturers with very high requirements for crimping. The ingredients are QPQ and heat-treated fine embroidery technology, which can make the product size more accurate, and it is common with JAM, Xinming and terminal machines.



4S-40 pneumatic horizontal die

Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various horizontal terminals

4E-40 pneumatic straight mold



Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various straight terminals