□□4TS □□JW-AP16

Model No. JW-AP16



SPECIFICATIONS

JW-AP16 (4TS) □□□□□□□□□□□□□□□□□□□□

[illegible]	[illegible]
[illegible]	[illegible]
[illegible]	[illegible]OTP [illegible]U
[illegible]	[illegible]

[illegible]

— [illegible]OTP [illegible]U [illegible]4TS

— [illegible]

— [illegible]4TS [illegible]

— [illegible]4TS [illegible]

— [illegible]OTP [illegible]U [illegible]

4TS precision horizontal mold

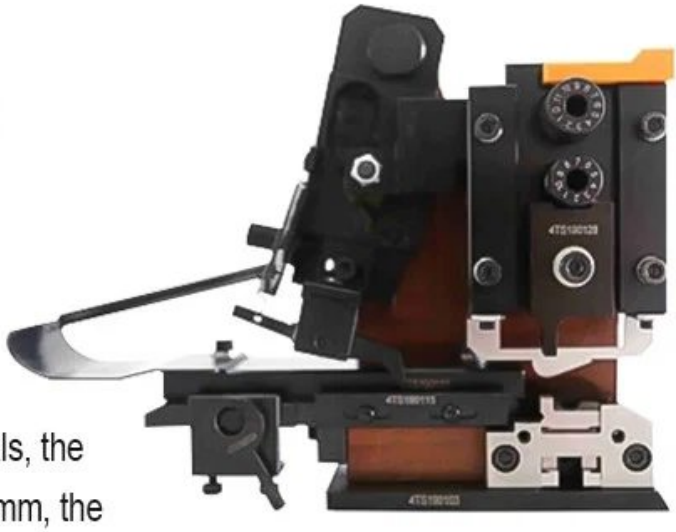

Feeding method: horizontal feed
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.

4TE precision straight mold



Feeding method: direct delivery
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.