EM-6B1 EM-6B2

Model No. EM-6B1 EM-6B2



SPECIFICATIONS

	EM-6B2
	0.25 – 10 mm²
	Cu/Al
	12.7 KN
	AC 220 / 110 V
	325 × 265 × 150
	16.8
	CW/CCW,

EM-6B2

EM-6B2 0.25mm² 10mm² 7mm

—

EM-6B2

:

0.25mm² 10mm² 7mm —


0 V CW/CCW,

325×265×150mm

:

CW/CCW

[illegible] 0.25–35mm²
[illegible] 2×0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0mm²
[illegible] O [illegible] Y [illegible] 0.25, 0.5, 1.0, 2.0, 2.5, 4.0, 6.0mm²
[illegible] O [illegible] Y [illegible] 0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0, 10.0mm²
[illegible] 0.5, 1.0, 2.0, 2.5, 4.0, 6.0mm²
[illegible] 0.5, 1.0, 2.0, 4.0mm²

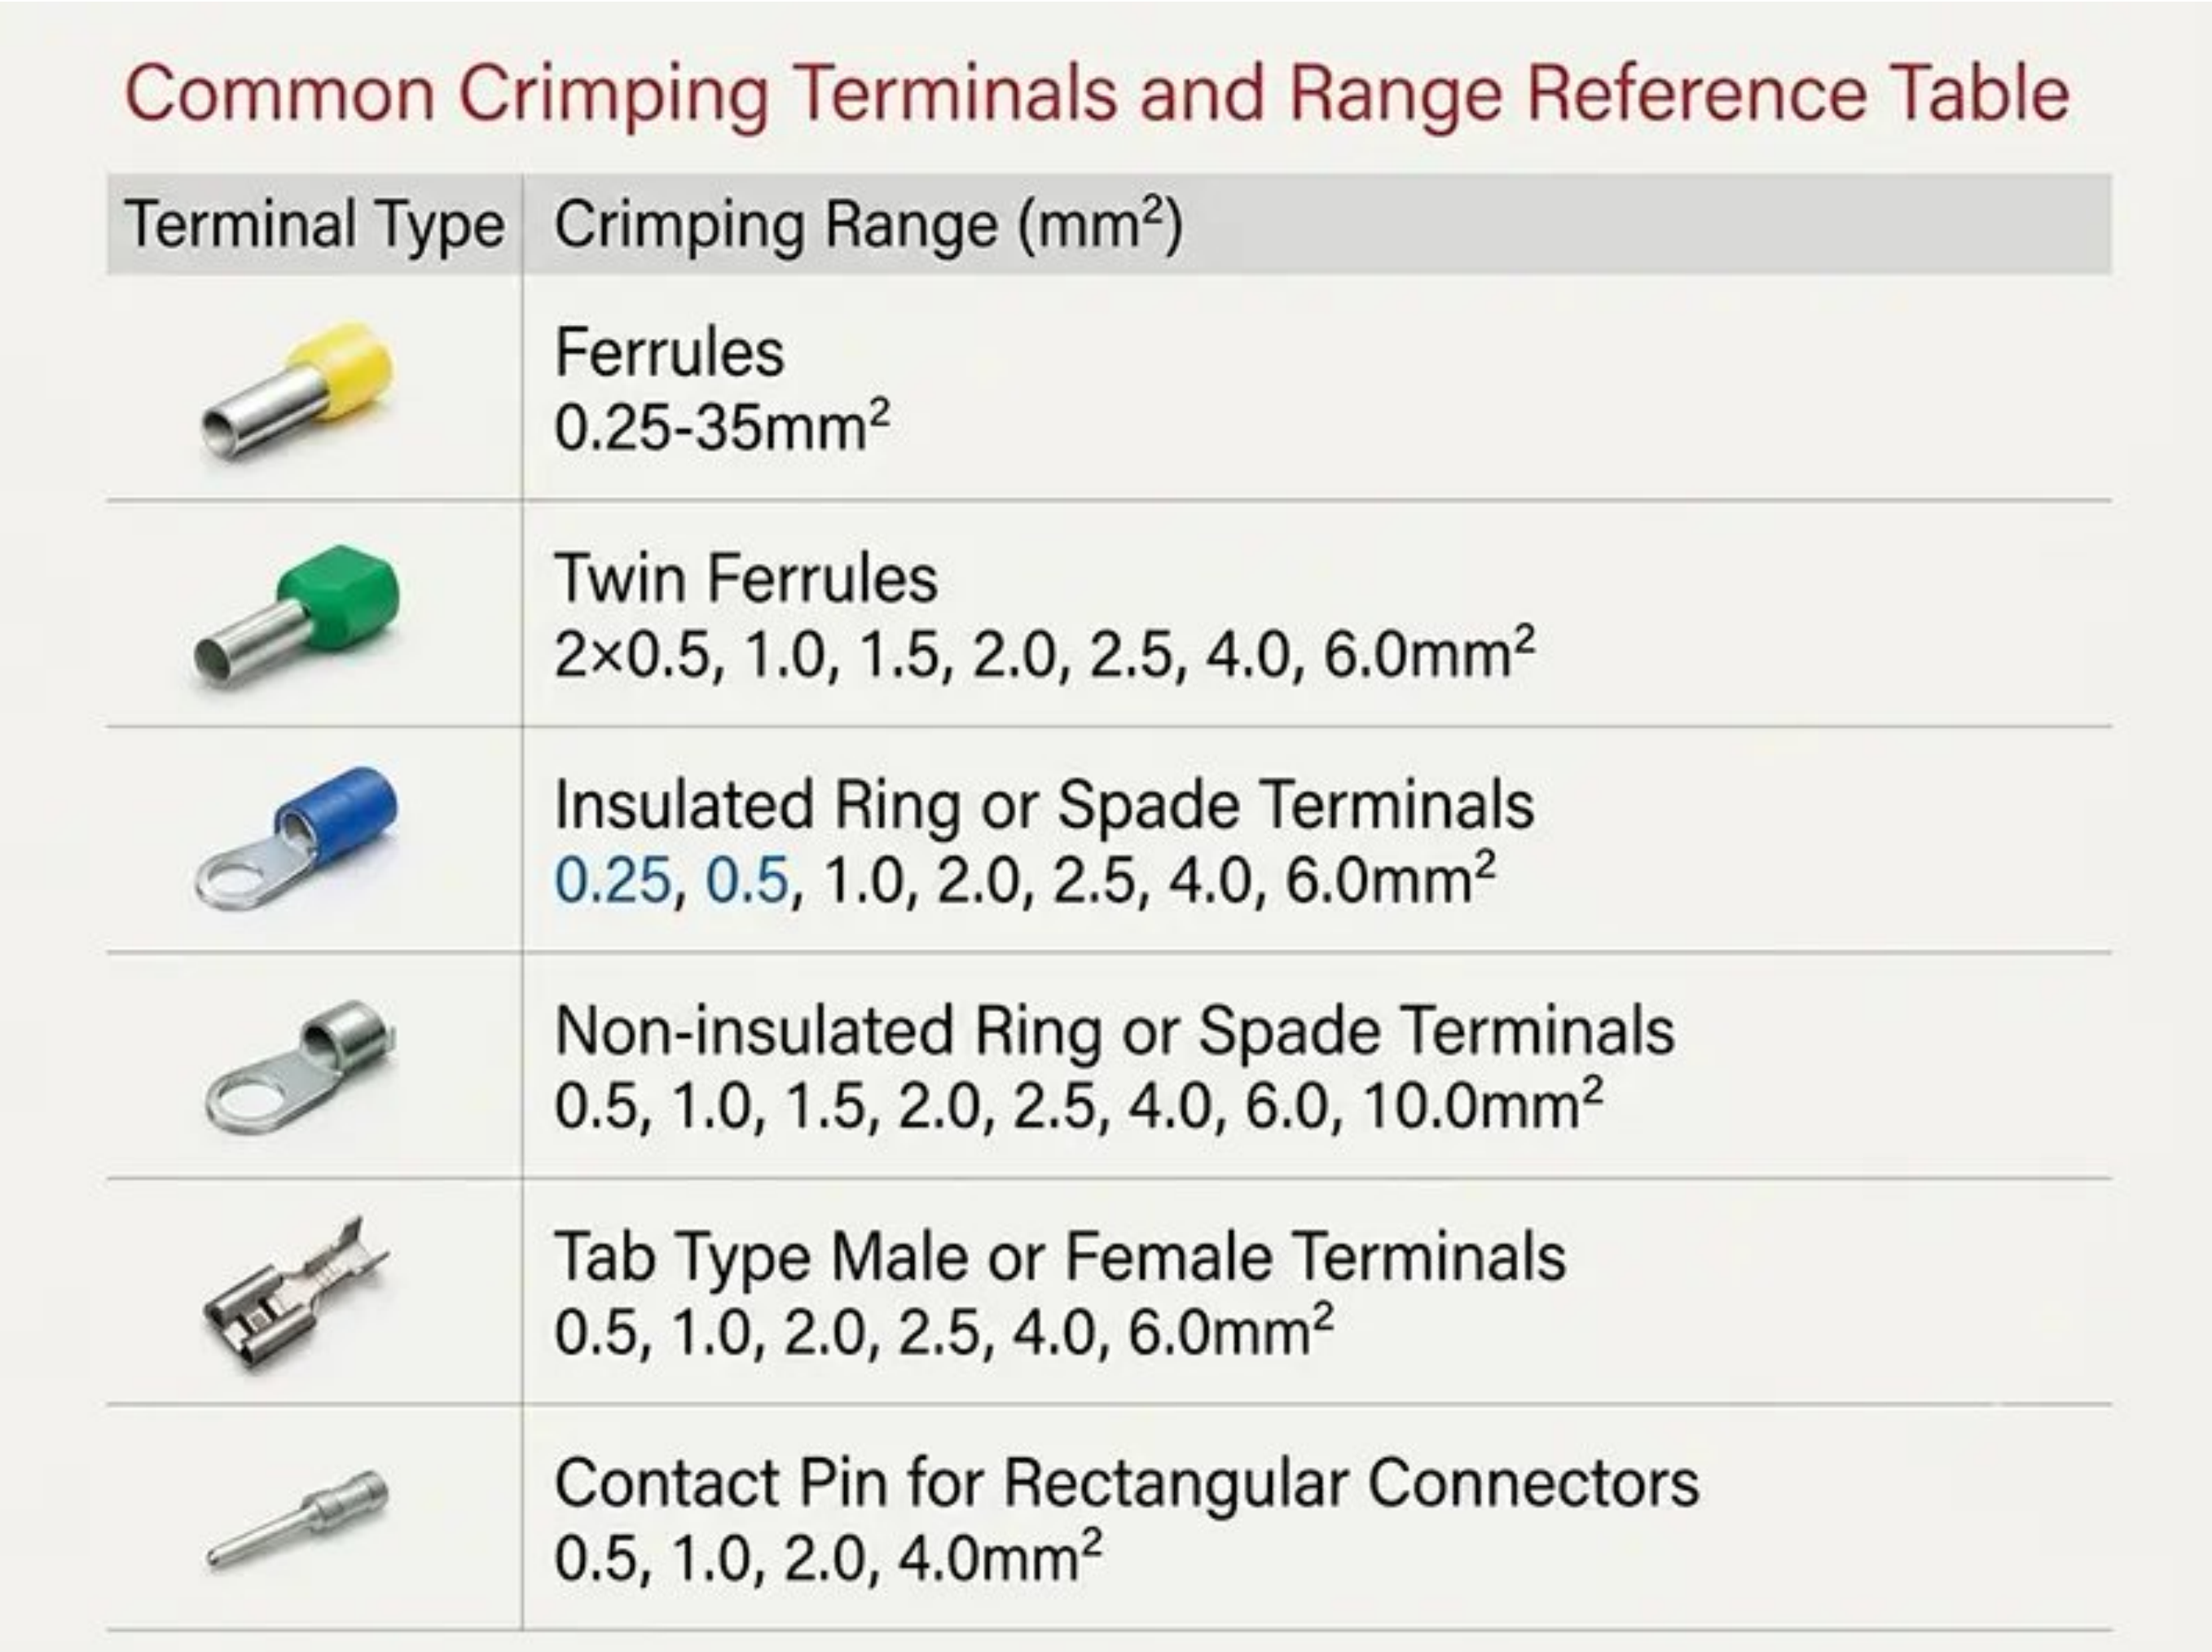
Common Crimping Terminals and Range Reference Table

Terminal Type	Crimping Range (mm²)
	Ferrules 0.25-35mm²
	Twin Ferrules 2×0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0mm²
	Insulated Ring or Spade Terminals 0.25, 0.5, 1.0, 2.0, 2.5, 4.0, 6.0mm²
	Non-insulated Ring or Spade Terminals 0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0, 10.0mm²
	Tab Type Male or Female Terminals 0.5, 1.0, 2.0, 2.5, 4.0, 6.0mm²
	Contact Pin for Rectangular Connectors 0.5, 1.0, 2.0, 4.0mm²


[illegible]
[illegible] — [illegible]
[illegible] — [illegible]
[illegible] — [illegible]

[illegible]	[illegible]
[illegible]	EM-6B2
[illegible]	[illegible]
[illegible]	0.25 – 10 mm²
[illegible]	[illegible] / [illegible] 7 mm

[illegible]	[illegible]7 [illegible]
[illegible]	12.7 KN
[illegible]	AC 220 / 110 V
[illegible]	325 × 265 × 150 mm
[illegible]([illegible]/[illegible]	16.8 kg
[illegible]	[illegible]
[illegible]	[illegible], [illegible], [illegible]CW/CCW, [illegible]

Product Images



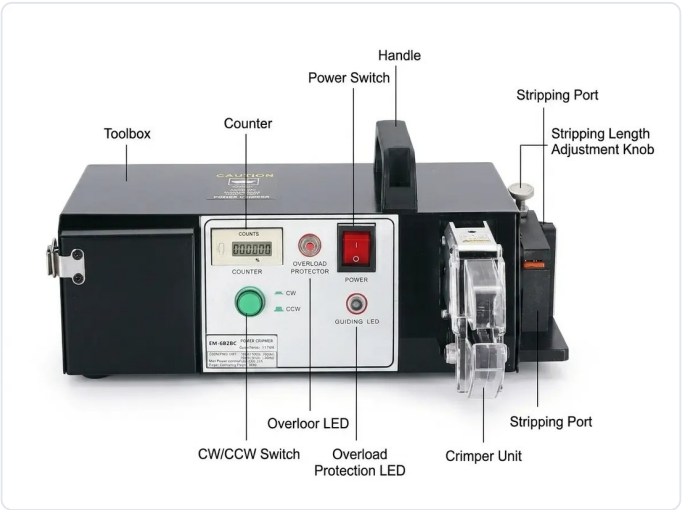

FAQ

[illegible]EM-6B1 [illegible]EM-6B2 [illegible]?

[illegible]EM-6B1 [illegible]EM-6B2 [illegible]EM-6B1 [illegible]110V AC [illegible]EM-6B2 [illegible]220V AC [illegible] [illegible]0.25-10 mm², [illegible]7 [illegible], [illegible] 12.7KN [illegible]1.5 [illegible]

[illegible]?

[illegible] EM-6B1 [illegible] EM-6B2 [illegible] [illegible] (0.25–35 mm²), [illegible](2×0.5–6.0 mm²), [illegible]O/Y [illegible](0.25–6.0 mm²), [illegible]O/Y [illegible](0.5–10.0 mm²), [illegible]/[illegible] (0.5–6.0 mm²), [illegible] (0.5–4.0 mm²) [illegible] [illegible]7 [illegible]

[illegible]?

[illegible] 12.7KN [illegible] 1.5 [illegible]

[illegible]?

[illegible] EM-6B1 [illegible] EM-6B2 [illegible] (Cu) [illegible] (Al) [illegible] 7 [illegible] 0.25-10 mm² [illegible]

[illegible]?

[illegible] EM-6B1 [illegible] EM-6B2 [illegible] CW/CCW ([illegible]/[illegible]) [illegible]