
JST JW-AP18

Model No. JW-AP18

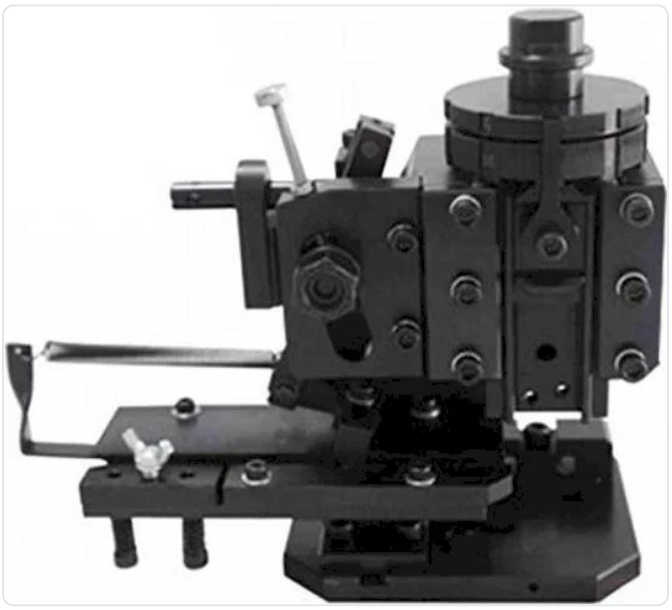

SPECIFICATIONS

JW-AP18 JST OTP U

JST JST JST

1.
2. OTP U U
3.
4.
5. JST
6.

	JW-AP18
	OTP U

[illegible]	[illegible]
[illegible]	[illegible]OTP [illegible]U
[illegible]	[illegible]
[illegible]	[illegible]

[illegible]

— [illegible]JST [illegible]U [illegible]

— [illegible]

— [illegible]JST [illegible]

— [illegible]

— [illegible]



JST horizontal mode

Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: suitable for JST automatic terminal machine and hand punching machine.

JST straight mold

Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: Suitable for JST automatic terminal machine and 40 stroke terminal machine.





JST flag mold

Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: 187/205/250 flagship terminal matching mold, 40 stroke terminal machine.