
# 0-20 WPM-315

Model No. WPM-315

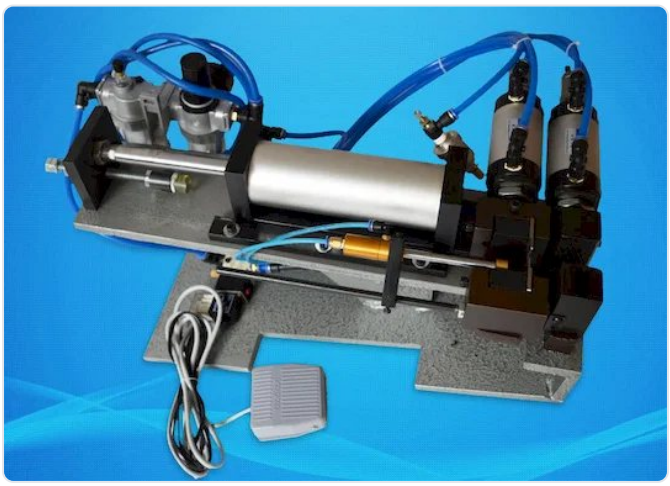

**SPECIFICATIONS**

| | |
|---|---|
| | 150 |
| 0-20 | |
| | 0.5-0.7 MPa |
| | 220V / 50HZ, 110V / 60HZ |
| | 84-196 KG |
| | 65 KG |
| | L1100 * W550 * H450 mm |

(WPM-315)
**WPM-315:**

**WPM-315** WPM-315 WPM-315

WPM-315

- **0-20**
- 0 20
- 
- 

- [illegible] WPM-315 [illegible]
- [illegible]
- [illegible] WPM-315 [illegible]
- [illegible]
- [illegible]
- [illegible] WPM-315 [illegible] AC/DC [illegible]
- [illegible]
- [illegible]

[illegible]

| [illegible] | [illegible] |
|---|---|
| [illegible] | [illegible]315 |
| [illegible] | [illegible] |
| [illegible] | [illegible], [illegible], [illegible] |
| [illegible] | 150 [illegible] |
| [illegible] | 0-20 [illegible] |
| [illegible] | 0.5-0.7 [illegible] |
| [illegible]tag [illegible] | 220V / 50HZ, 110V / 60HZ |
| [illegible](Clamping) | 84-196 [illegible] |
| [illegible] | 65 [illegible] |
| [illegible](LWH) | L1100W550H450 [illegible] |
| [illegible] | [illegible], [illegible] |
| [illegible] | [illegible], [illegible], [illegible], [illegible] [illegible] |
| [illegible] | [illegible]AC/DC, [illegible], [illegible], [illegible]/[illegible], [illegible] [illegible], [illegible] |

## [illegible]


[illegible] **WPM-315** [illegible]


- [illegible]
- [illegible]
- [illegible]
- [illegible]
- [illegible]
- [illegible]

## [illegible]

[illegible] **WPM-315** [illegible]



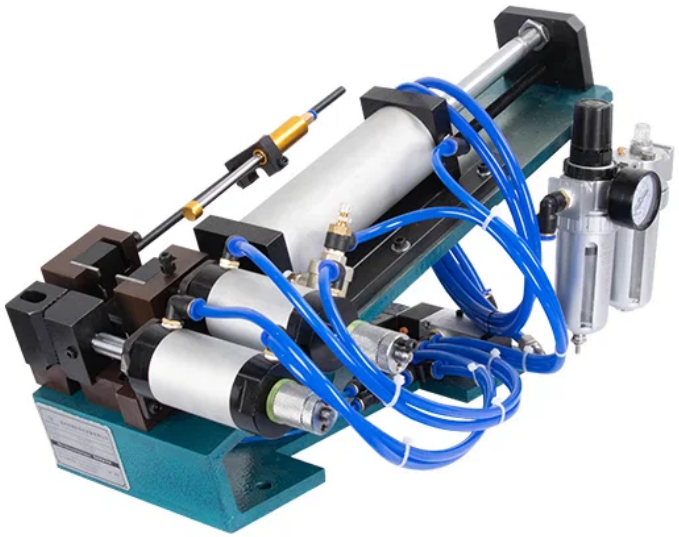

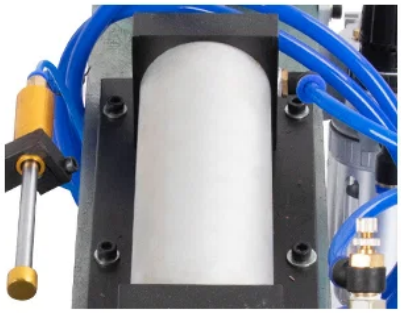


**Adjusting The Master Cylinder**

Main cylinder mainly used to adjust the stripping length, reciprocating double intake, more rapid action.



**Adjusting Cylinder**

Cylinder for adjusting the distance of theblade and the fast distance of the clamping line.

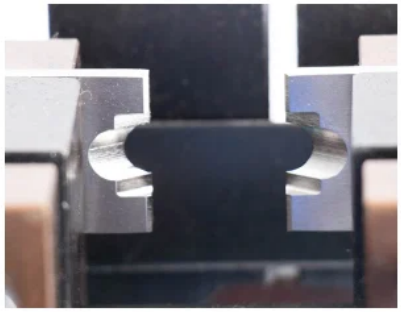

**Stripping Processing Area**

Applicable to different size of wire, easy to operate and good stripping effect



**Barometer**

The record shows the air pressure value during processing, simple structure, small range and high accuracy.





| Model | WPM-305 | WPM-310 | WPM-315 | WPM-330 | WPM-416 |
|---|---|---|---|---|---|
| Wire Size | 1 - 5mm | 1 - 10mm | 1 - 15mm | 1 - 20mm | 1 - 30mm |
| Stripping Length | 3 - 50mm | 3 - 100mm | 3 - 150mm | 3 - 330mm | 3 - 150mm |
| Cylinder Dia. | Ø40 | Ø50 | Ø60 | Ø60 | Ø80 |
| Force | 31-37Kg | 49-115Kg | 84-196Kg | 84-196Kg | 165-300Kg |
| Power Supply | 220V | 220V | 220V | 220V | 220V |
| Dimension | 40×30×27cm | 48×33×28cm | 60×42×36cm | 110×55×45cm | 80×62×55cm |
| Net. Weight | 20Kg | 25Kg | 35Kg | 65Kg | 50Kg |
| Packing | Packed in Wood Case (Standard Export Packing) | | | | |

## FAQ

**[illegible]JINGWEI Pneumatic Cable Stripping Machine WPM-315 [illegible]?**

[illegible] JINGWEI WPM-315 [illegible]

**[illegible]( [illegible] WPM-315 [illegible]?**

[illegible] WPM-315 [illegible]

**[illegible]WPM-315 [illegible]?**

WPM-315 [illegible] JINGWEI [illegible]

## JINGWEI

JINGWEI WPM-315

## WPM-315

Pneumatic Cable Stripping Machine WPM-315 JINGWEI