0-5 mm WPM-305

Model No. WPM-305

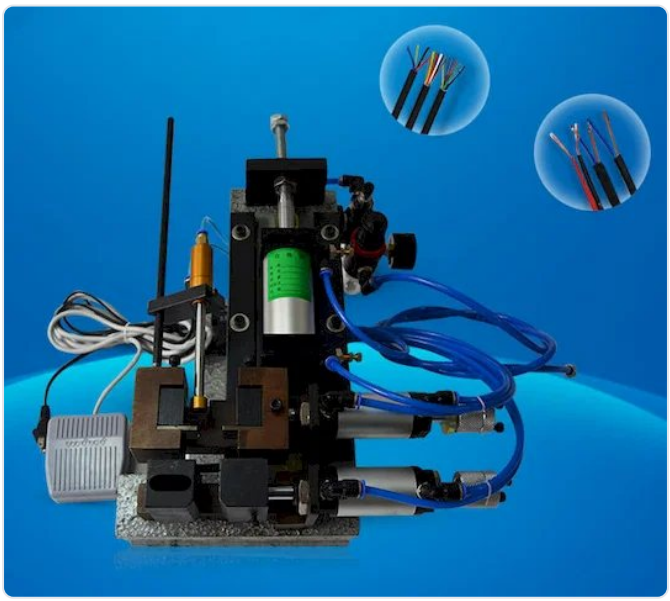

SPECIFICATIONS

	WPM-305
	50
	0-5
	0.3-0.7 MPa
	220V / 50 Hz 110V / 60 Hz
	31-73
	20
	L400 * W300 * H270

WPM-305 0 5 mm 50 mm 31–73 kgf 0.3–0.7 MPa 220 V/50 Hz 110 V/60 Hz

WPM-305

305 WPM 0–5 mm 50 mm 0–15 mm 100 mm WPM-310, 0–20 mm 150 mm WPM-315 0–30 mm 150 mm WPM-416 20 kg 20 mm WPM-330 20 mm

1. 0–5 mm 50 mm
2. 0.3–0.7 MPa 31–73 kgf
3.
4.
5. 220 V/50 Hz 110 V/60 Hz
6. 400 × 300 × 270 mm 20 kg

	WPM-305

[illegible]	[illegible]
[illegible]	0–5 mm
[illegible]	50 mm
[illegible]	0.3–0.7 MPa
[illegible]	31–73 kgf
[illegible]	220 V/50 Hz, 110 V/60 Hz
[illegible]	[illegible]400 × [illegible]300 × [illegible]270 mm
[illegible]	20 kg

[illegible]

[illegible] [illegible] [illegible] [illegible]

[illegible]	**WPM-305**	**WPM-310**	**WPM-315**	**WPM-330**	**WPM-416**
[illegible]	**1–5 mm**	1–10 mm	1–15 mm	1–20 mm	1–30 mm
[illegible]	**3–50 mm**	3–100 mm	3–150 mm	3–330 mm	3–150 mm
[illegible]	**Ø40**	Ø50	Ø60	Ø60	Ø80
[illegible]	**31–37 kg**	49–115 kg	84–196 kg	84–196 kg	165–300 kg
[illegible]	**220 V**	220 V	220 V	220 V	220 V
[illegible] ([illegible]× [illegible]× [illegible])	**40×30×27 cm**	48×33×28 cm	60×42×36 cm	110×55×45 cm	80×62×55 cm
[illegible]	**20 kg**	25 kg	35 kg	65 kg	50 kg
[illegible]	[illegible]				

[illegible]

— [illegible] [illegible] 0.5–2.5 mm² [illegible]

— [illegible] [illegible] 5 mm OD [illegible] 8–20 mm [illegible]

— [illegible] LED [illegible] [illegible] 2–4 mm² [illegible]

— [illegible] [illegible] 0.2 mm [illegible]

— [illegible] [illegible]

Product details

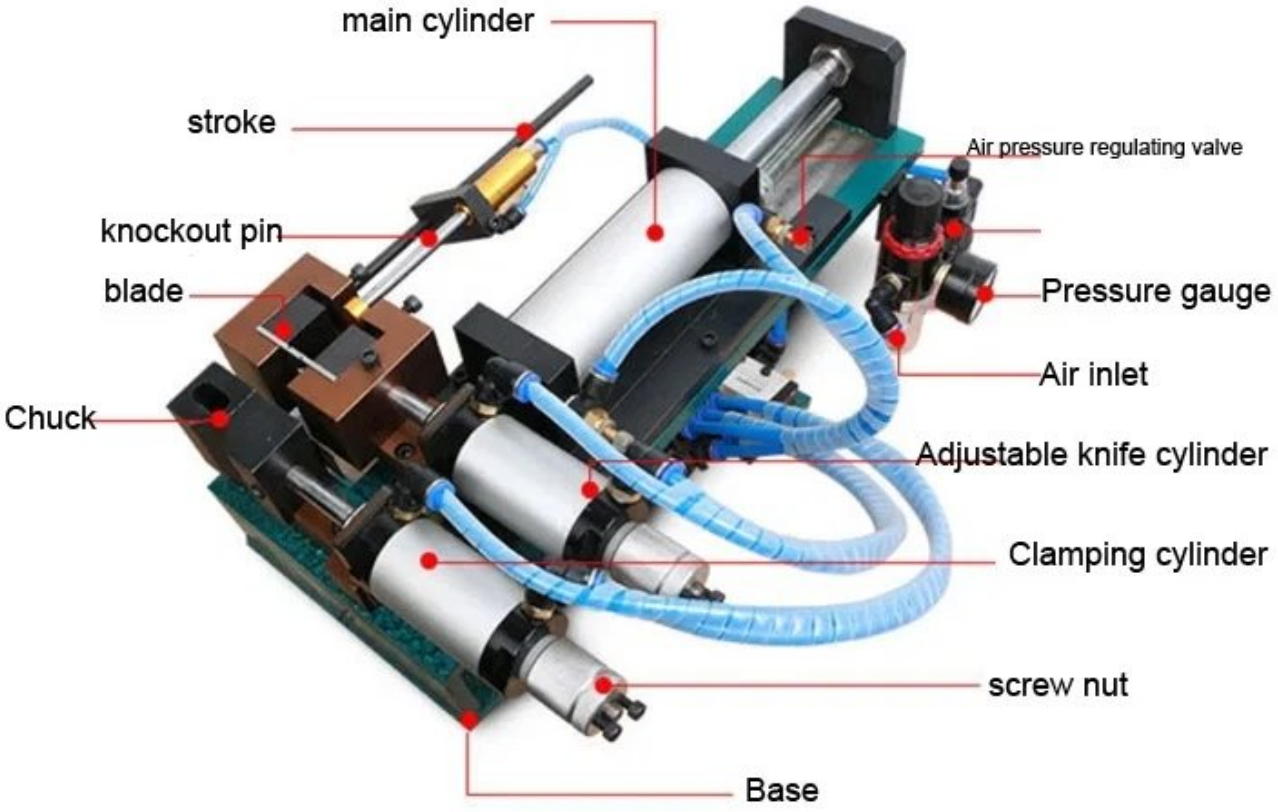



main cylinder



stripping cylinder and cable fixed cylinder



small cylinder to controll stripping length

solenoid valve and air tubes





“V” shaped stripping blades

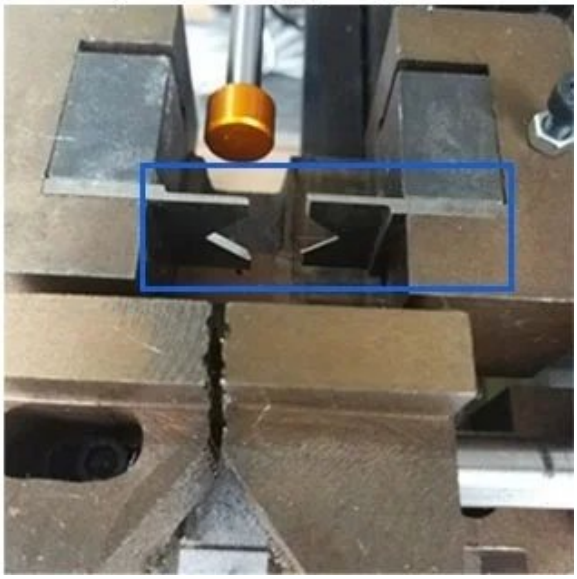


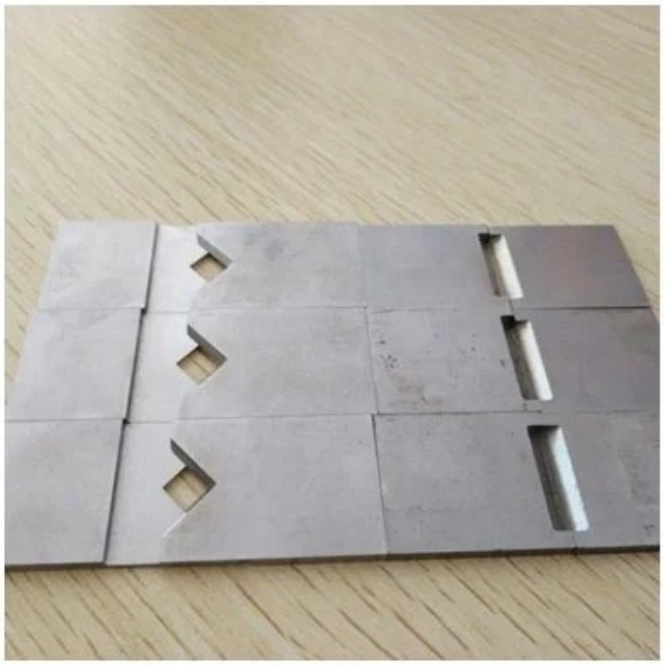





FAQ

WPM-305 ?

WPM-305

JINGWEI WPM-305 ?

JINGWEI WPM-305 0.5 6.0 (AWG 30 10) PVC

WPM-305

( ) .

JINGWEI WPM-305?

JINGWEI WPM-305 .

JINGWEI CE .

WPM-305 ?

(0.5-0.7 MPa) .

JINGWEI .