0.1-8.0sq.mm WPM-09JE

Model No. WPM-09JE



SPECIFICATIONS

	WPM-09JE
	0.1-8.0 sq.mm
	10
	0-50
	0-50
	1-9999
	39 x 35 x 25

WPM-09JE

WPM-09JE -

WPM-09JE WPM-09JE

WPM-09JE

- **LCD** LCD
- **4** • 4

WPM-09JE

- :
- :
- : •
- :
- :
- :

:

- : 0.1 ² 8.0 ² (AWG32 # AWG8 #)
- : ¢ 10
- : 1 9999

- **High Cutting Precision:** Maintains a tight cutting tolerance of ± (0.002 × L), where L is the cutting length, guaranteeing accurate and consistent cuts every time.
- **Adjustable Stripping Length:** Head stripping length adjustable from 0~50mm, and tail stripping length from 0~50mm, catering to a wide range of stripping requirements for different wire types and applications.
- **Multi-Section Middle Stripping Capability:** Capable of up to 11 sections of middle stripping, allowing for complex wire configurations and advanced harness preparation with precision.
- **Efficient Processing Speed:** Achieves processing speeds of 3000-5000 pieces per hour, significantly boosting production throughput while maintaining high levels of accuracy and quality.
- **Power and Dimensions:** Operates on standard 220V/50Hz or 110V/60Hz power supply, with a power rating of 300W, and optimized dimensions of 537 * 507 * 400 mm, weighing 34kg, making it suitable for integration into various production environments.

:

Invest in the **Wire Stripping Cutting Machine WPM-09JE** to revolutionize your wire processing operations. This superior **Cable Stripping Machine** and advanced **Wire Stripping Cutting Machine** provides unmatched precision, speed, and versatility, making it the ultimate solution for maximizing your production efficiency and product quality. Contact us today to learn more about how the **Wire Stripping MachineWPM-09JE** can transform your wire processing line and elevate your manufacturing capabilities!


Weight: 34kg

Model	WPM-09D	WPM-09JE	WPM-09JE
Wire material	PVC, teflon, fiberglass wire...	PVC, teflon, fiberglass wire...	PVC, teflon, fiberglass wire...
Conductor cross-section	0.1 - 8.0 mm^2 (32 - 8 AWG)	0.1 - 8.0 mm^2(32 - 8 AWG) Note: BV wire < 4mm^2	0.1 - 10 mm^2(32 - 7 AWG) Note: single-stranded BV < 6 mm^2; 7 core BV

Cutting length	1 - 99,999 mm	1 - 99,999 mm	1 - 100,000 mm
Cutting length tolerance	0.002 * L	0.002 * L	0.002 * L
Stripping length	Side I: 0 - 35 mm Side II: 0 - 15 mm	Side I: 0-50mm Side II: 0 - 50 mm	Side I: 0 - 80 mm Side II: 0 - 80 mm
Maximum guide tube diameter	8 - 10 mm	8 - 10 mm	13 mm
Productivity	33 - 83pcs/min	33-83pcs/min	50-133pcs/min
Noise level	< 70 dB(A)	< 70 dB(A)	< 70 dB(A)
Power supply	110, 220 V (50 - 60 Hz)	110, 220 V (50 - 60 Hz)	110, 220 V (50 - 60 Hz)
Power	300 W	300 W	500 W
Gross Weight	34 kg	34 kg	34 kg
Carton dimension	537 * 507 * 400 mm	537 * 507 * 400 mm	537 * 507 * 400 mm





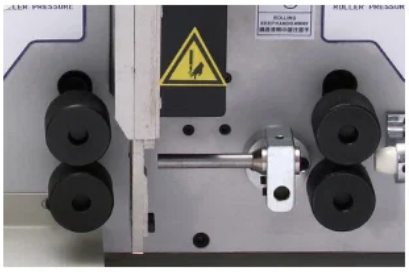


LCD Screen with Programable Setting

Different modes and fast production setup for different applications.

4-Wheel Driving

Ensure the smooth cutting and stripping process.

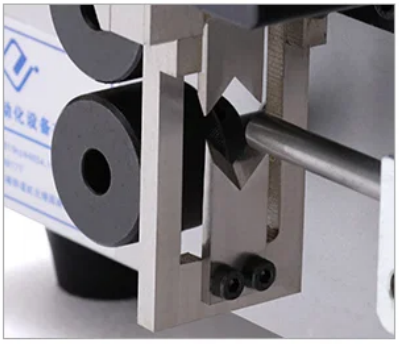




High Speed and Steady Blades

Tungsten steel material is selected.

Standard Parts Prepared

Protective cover, optional guide tubes and pratical toolings.

Application

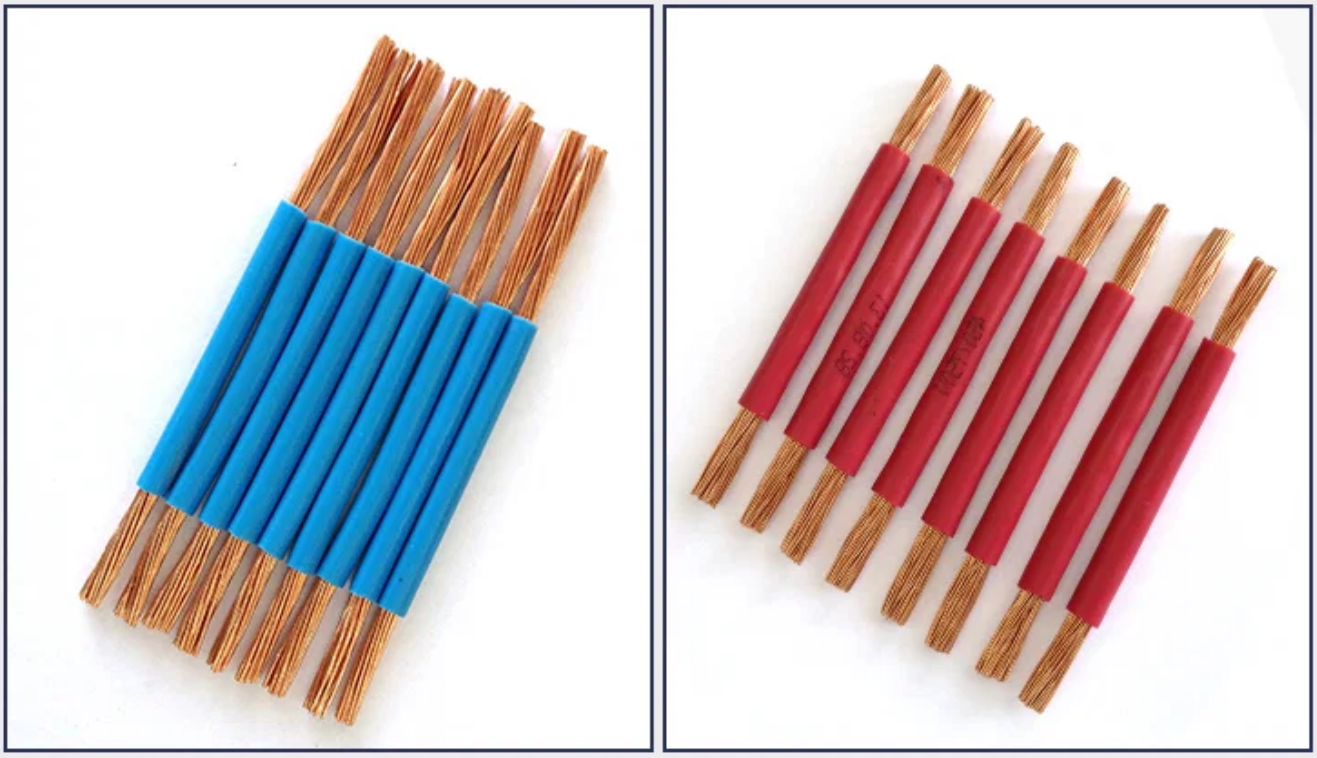

FAQ

WPM-09JE

WPM-09JE 0.1mm² 8.0mm² 50mm

1mm 9999mm

WPM-09JE

WPM-09JE

WPM-09JE

WPM-09JE PVC

WPM-09JE

WPM-09JE